CARTRIDGE

UTO BLACK 5555

Authorized Licensee of HP USA for
TIJ Printing Technology in India.



Utopia Automation & Control Pvt.Ltd.

Technical Data Sheet


UTO BLACK 5555 is designed for coding and marking and other high-productivity industrial packaging printing applications.

This ink provides fast drying time and excellent sharpness on semi-porous & non-porous substrates.

Technical Specifications

Ink Name	UTO BLACK 5555
Ink type	Black dye based ink
Drying time	1-3 sec at 300x300 dpi
Resolution (dpi)	Up to 600 dots per inch Recommended - 300 x 300 dpi
Shelf life	12 months from fill date
Firing voltage	8.6 V
Fire pulse width	1.8 µs
Throw distance	Up to 5 mm, recommended 3 mm
Aver. delivered Ink	34 ml (Vertical) 33 ml (Horizontal)
Operating conditions	15°C to 35°C , 35 % to 80 % RH

- Solvent Base
- Non-Porous surface
- Cost effective
- Premium Ink

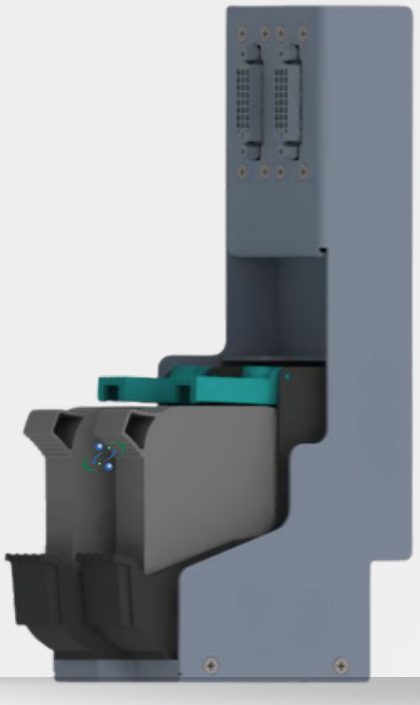

Utopia Automation & Control Pvt.Ltd.

P-4/5, IT Park, Old MIDC, Satara, Maharashtra, 415002

sales@utopiacontrol.com

www.utopiacontrol.com

+ 91 8459614126